

Windrow Data Logger



Tired of writing down temperatures on your clipboard? Tired of lost data or missing data?

Tired of inaccurate data?

Tired of keeping piles of paper in your office?

REOTEMP has a solution....

Stores Temperature Readings

Features/Benefits:


- Accurate data
- Organized data
- Saves time
- Water-resistant sheath
- Custom ID tags
- Software included
- NO MORE CLIPBOARDS!

HOW IT WORKS

- 1. **Load your locations** into the handheld unit (1 time setup)
- 2. Walk the windrows and **record temperature data** into the handheld unit.
- 3. Upload the data into the computer software.
- 4. Export the data into an Excel[®] spreadsheet for record keeping or print it out.

Everything you need for \$1,199

(Part # WDL-CK36FR includes all 3 items below)

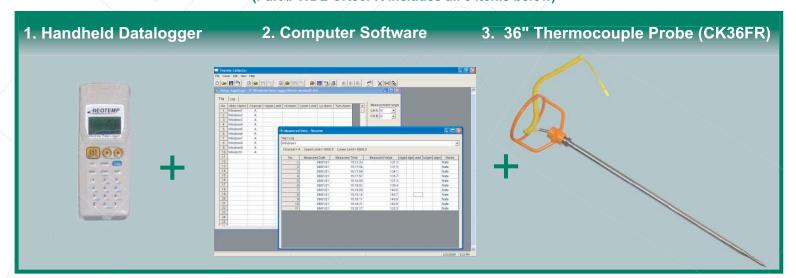



Windrow Data Logger

SPECIFICATIONS

Characteristic	Description
Temperature Range	Type K Thermocouple: -200C to 1372C (-328F to 2501.6F)
Resolution	0.1C or .1F
Accuracy	< 1.0C
Water-resistant shealth	Water-resistant shealth (included)
Drip-proof construction	Conforms to IP54 standards (dust-proof and drip-proof)
Data capacity	5000 data items when in collector mode.
Tag Names	Maximum of 50, each comprising of up to 8 alphanumeric characters
Operator Names	Maximum of 10, each comprising of up to 8 alphanumeric characters
Comments	Maximum of 32, each comprising of up to 8 alphanumeric characters
Alarm function	Upper and Lower-limit alarms
Display	LCD with backlight
Battery	Two AA-size batteries (included)
Battery Life	Approx. 20 days when operated in collector mode 2 hours a day including 30 minutes of communication.
Communication function	RS-232C standard
Software requirements	CPU:i486DX or higher, OS: Windows 95/Windows 98/ Windows NT 4.0, FDD 3.5", 1.44 MB-formatted. Required space on the HDD: 10 MB or greater. Recommended memory capacity: 16MB or greater. Serial I/O capability: A serial port conforming to RS-232C standard should be available. Software: Microsoft Excel 95, Microsoft Excel 97.
External Dimensions	Approx. 151(H) x 56(W) x 33(D) mm
Warranty	1 year limited warranty